

CR-100 & CR-200 COPY ROUTERS



 CR-200 Twinhead Copy Router



 CR-100 Twinhead Copy Router


Features

- Heavy-duty copy routers for PVC or aluminum profiles
- Cast aluminum machine base with enclosed sheet metal stand
- Both models include two standard horizontal and pneumatic clamps with foot pedal operator
- Spraymist coolant system for aluminum routing applications standard
- Three step copy pin - 5, 8, 10 mm
- Three position revolving depth stop
- Blank templates, one per routing head; custom templates available upon request
- Optional workpiece supports and measuring devices available for gauging off-end, on-center & off-center routing applications

ROUTERS / 02-10

www.cseautomationllc.com

CR-100 & CR-200 COPY ROUTERS

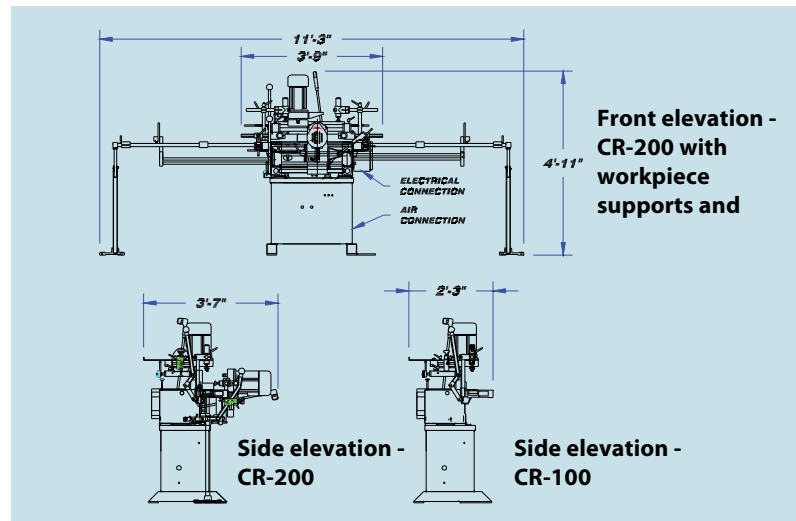

TECHNICAL SPECIFICATIONS CR Single & Twinhead Copy Routers		CR-1	CR-2
Approximate Machine Dimensions			
Length		45"	45"
Width (Depth)		27"	43"
Height		59"	59"
Weight		200 lbs.	275 lbs.
Maximum router head stroke - Vertical		11.8" x 3.95"	11.8" x 3.95"
Horizontal			7.85" x 3.15"
Maximum router spindle stroke - Vertical		5.5"	5.5"
Horizontal			3.5"
Utility Requirements (CSA Certification available)			
Standard Voltage**		220 / 440 Volts, 3 Ph. 50 - 60 Hz	220 / 440 Volts, 3 Ph. 50 - 60 Hz
Horsepower / Speed (per motor)		1.6 hp / 3,230 rpm	2 - 1.6 hp / 3,230 rpm
Amperage (FLA, total)		6.7 / 3.3 amps	12.9 / 6.4 amps
Air Pressure		80 to 120 psi	80 to 120 psi
Air Consumption, estimated		.5 cu.ft. / cycle	.65 cu.ft. / cycle
**Optional voltages available upon request			
<i>Technical information as of October, 2003. CSE Automation, LLC, reserves the right to make changes.</i>			

CR-100 & CR-200 / 02-10

CSE Automation, LLC

www.cseautomationllc.com

CSE Automation, LLC • 7826 CenTech Road, Omaha, NE 68138 • Phone: (402)861-6100 • Fax: (402)861-6199